


# Selma

- an elegant slip over

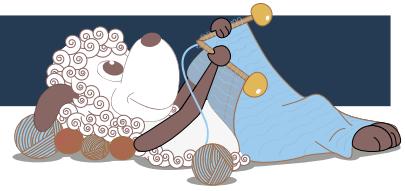

Design: Trine Wohllebe

*This elegant slip over is worked on small needles and has a base of reverse stockinette stitch with rib ridges, which are worked as cables at the waist. The cables provides a bit of shaping at the waist and the rolled edges gives a discreet finish to the garment. The slipover can be made extra glamorous by adding a bead at the centre of each cable.*

2nd English edition - May 2015 © Filcolana A/S

English translation: Signe Strømgaard

## Materials

Approx. 200 (200) 250 (300) g of Anina (color 2169)  
by Filcolana  
2,5 and 3 mm needles

## Sizes

S (M) L (XL)

## Measurements

Body, chest: 82-90 (90-98) 98-106 (106- 114) cm  
Sweater, chest: 90 (98) 106 (114) cm  
Total length: 52 (55) 58 (60) cm

## Gauge

29 sts and 39 rows in stockinette stitch on 3 mm  
needles = 10 x 10 cm.



## Selvedge stitches

The first and last stitch on every row must be knit.

## Back

Cast on 134 (146) 158 (170) sts on a 2,5 mm needle. Work a total of 4 (4) 6 (6) rows of reverse stockinette stitch for the rolled edge. The first row is a WS row. Change to 3 mm needles and work in the base pattern. Start with the first 5 sts at the right side of the chart, then repeat the pattern repeat a total of 10 (11) 12 (13) times and end with the 9 sts at the left side of the chart. Work straight in pattern until the work measures approx. 11 (13) 15 (17) cm. Now work the cable chart (start on a RS row with the first row of cables) until all rows of the chart has been worked. Continue in the base pattern and work straight until the back measures approx. 33 (35) 37 (39) cm.

## Armhole

Bind off 6 (7) 7 (8) sts at the beginning of the next 2 rows for the armholes, then bind off 0 (0) 4 (4) sts at the beginning of the next 2 rows, then 2 (3) 2 (2) sts at the beginning of the next 2 rows, then 1 stitch at the beginning of the next 6 rows.  
Work 2 rows straight in pattern, then bind off 1 stitch at the beginning of the next 2 rows.

Work 4 rows straight in pattern, then bind off 1 stitch at the beginning of the next 2 rows.

There are now 108 (114) 122 (130) sts on the needle.

Continue straight in pattern until the work measures 48 (50) 53 (55) cm.

### Neckline and shoulders

Bind off the center 26 (30) 32 (32) sts and finish each side separately.

**Left side:** Bind off for the neckline at the beginning of every other row. Bind off 6 (5) 5 (6) sts, then 4 sts, then 3 sts, then 2 (0) 1 (2) st(s) = 26 (30) 32 (34) sts on the needle. Continue straight until the work measures 51 (54) 57 (59) cm. Bind off sts at the armhole side to slope the shoulder. Bind off 9 (10) 11 (12) sts at the beginning of the row at the armhole side, then bind off 9 (10) 11 (11) sts, then 8 (10) 10 (11) sts.

**Right side:** Work the same way as the left side, only mirror reversed.

### Front

Work the same way as the back until the armhole measures 3 (3) 5 (5) cm. Bind off the center 16 (18) 22 (24) sts and finish each side separately.

**Right side:** Continue working any remaining bind offs at the armhole the same way as for the back while at the same time working the shaping at the neckline by binding off sts at the beginning of every other row at the neck edge. Bind off 5 (4) 4 (5) sts, then 4 (3) 3 (3) sts, then 1 stitch a total of 8 times. Work 3 rows straight in pattern and bind off 1 stitch at the beginning of the next row twice, then work 5 rows straight and bind off 1 stitch at the beginning of the next row once. 26 (30) 32 (34) sts on the needle. Continue straight until the work measures the same as the back shoulder and bind off for the shoulder slope the same way as on the back.

Finish the other side of the front the same way, only mirror reversed.

### Finishing

Sew the right shoulder seam.

**Neck edge:** Start at the left shoulder and pick up and knit approx. 12 (122) 132 (142) sts from the RS along the front using a 2,5 mm needle, then pick up approx. 65 (69) 71 (73) sts along the back neck edge. Start with a knit row from the WS and work a total of 4 (4) 6 (6) rows in reverse stockinette. Bind off knit-wise from the WS.


Sew the left shoulder seam.

**Sleeve edges:** Start at the bottom of each armhole and pick up and knit approx. 106 (112) 120 (128) sts from the RS along the edge of the armhole using a 2,5 mm needle. Knit a rolled edge the same way as for the neck edge. Sew the side seams.



## Chart

Cable Pattern

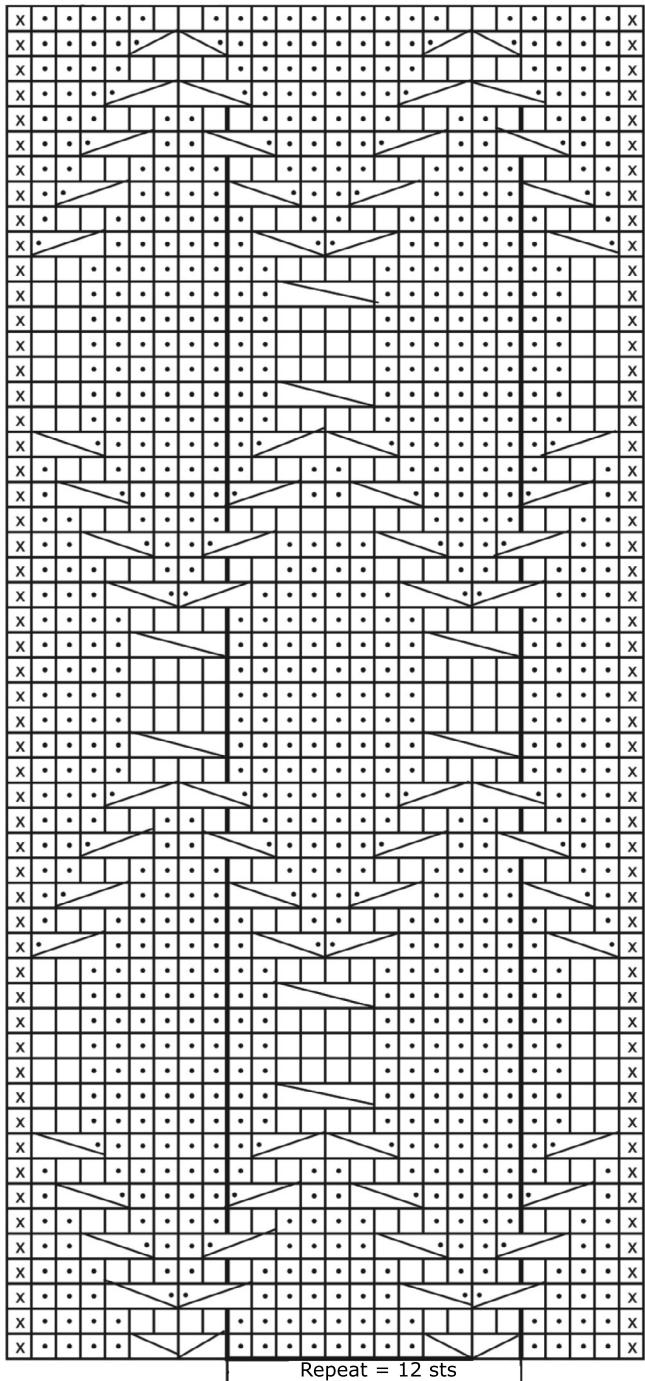

- edge stitch
- knit on the RS, purl on the WS
- purl on the RS, knit on the WS
- slip 1 stitch to a cable needle and hold to back of work, k1, k1 from cable needle
- slip 1 stitch to a cable needle and hold to front of work, k1, k1 from cable needle
- slip 1 stitch to a cable needle and hold to back of work, k1, p1 from cable needle
- slip 1 stitch to a cable needle and hold to front of work, p1, k1 from cable needle
- slip 1 stitch to a cable needle and hold to back of work, k2, p1 from cable needle
- slip 2 sts to a cable needle and hold to front of work, p1, k2 from cable needle
- slip 2 sts to a cable needle and hold to front of work, k2, k2 from cable needle

Base Pattern

